

Teagle

T/A/P Verge Mower



From hedges to dykes, in-line or offset, this is our most versatile flail mulcher.



Heavy Duty Gear box - with freewheel.

Wide Angle PTO Shaft - fitted on all T/A/P models.

Hydraulic Brake Away - safety valve.

All Bearings - are internal and greasable for long life.

Adjustable Rear Hood - fitted with rubber deflector.




Heavy Duty - ideal for use on tractors from 80 - 130 HP for cutting grass and clearing undergrowth up to 6 - 7 cm. in diameter.

Hammer Flails - for long life and a clean finish. The combination of high speed and an angled cutting edge lifts the undergrowth to give a clean tidy finish.

Flail Pivot Bolts - pass through heavy steel lugs welded onto the rotor tube. Bolt heads are square for good retention when changing flails.

Skids & Full Width 194 mm Roller - give good height control with minimal risk of scalping.

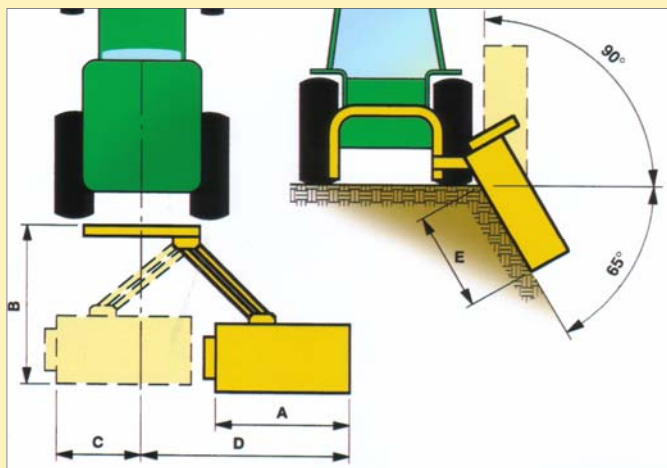

Specifications

	Cutting Width m. (A)	Tractor HP	No. of Hammers	No of Belts	PTO Speed	B	C	D	E	Weight kg.
TA/P 160	160	80 - 130	14	4	540	180	60	235	130	750
TA/P 180	180	80 - 130	16	4	540	180	60	255	150	850
TA/P 200	200	80 - 130	18	4	540	180	60	275	170	890
TA/P 220	220	80 - 130	20	4	540	180	60	295	190	940



The Company's policy is one of continuous improvement and development, therefore specifications are subject to change without notice.

Manufactured in Italy by Berti

Teagle Machinery Ltd.
Blackwater, Truro
Cornwall TR4 8HQ

Tel: 01872 560592
e-mail: sales@teagle.co.uk
website: www.teagle.co.uk