

From dykes to hedges, inline or off set, our most versatile flail mulcher.



**Heavy Duty** - ideal for use on tractors from 75 - 150 HP for cutting grass and clearing undergrowth up to 6-7cm in diameter.

**Hammer Flails** - for long life and a clean finish. The combination of high speed and an angled cutting edge lifts the undergrowth to give a clean tidy finish & exceptional mulching.

**Flail Pivot Bolts** - pass through heavy steel lugs welded onto the rotor tube. Bolt heads are square for good retention when changing flails.

**Skids & Full Width 194 mm Roller** - give good height control with minimal risk of scalping.


**Heavy Duty Gear box** - with freewheel with 4 belts driving down to the rotor with automatic adjuster.

**Wide Angle PTO** - Fitted to all TA/PS models.

**Hydraulic Brake Away** - safety valve.

**All Bearings** - are internal and greasable for long life.

**Adjustable Rear Hood** - fitted with rubber deflector.

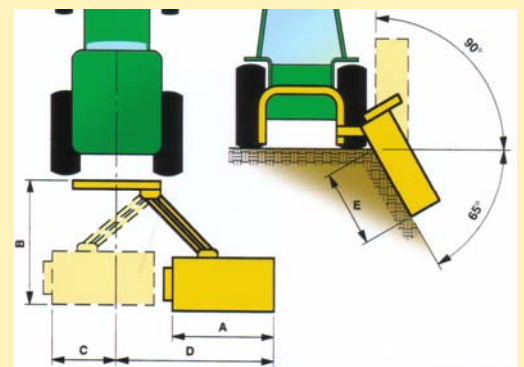

## Specifications

Model	Cutting Width m. (A)	Tractor HP	No. of Hammers	No of Belts	PTO Speed	B	C	D	E	Weight kg.
TA/PS 160	160	85 - 160	14	5	540	180	25	270	145	890
TA/PS 180	180	90 - 160	16	5	540	180	25	290	165	940
TA/PS 200	200	100 - 160	18	5	540	180	25	310	185	990
TA/PS 220	220	100 - 160	20	5	540	180	25	330	205	1050
TA/PS 250	250	100 - 160	22	5	540	180	25	360	235	1120



The Company's policy is one of continuous improvement and development, therefore specifications are subject to change without notice.

Manufactured in Italy by Berti