



From hedges to dykes, in-line or offset, this is our most versatile flail mulcher.



Height Adjustable - self cleaning rear roller .

Hydraulic Side-shift - with breakaway Valve.

All Bearings- are internal and greasable for long life.


Heavy Duty - Gear box with freewheel.

Floating Linkage - Allows head to pivot to follow contours.

Hammer Flails - for long life and a clean finish. The combination of high speed and an angled cutting edge lifts the undergrowth to give a clean neat finish.

Flail Pivot Bolts - pass through heavy steel lugs welded onto the rotor tube. Bolt heads are square for good retention when changing flails

Medium Duty - ideal for use on tractors from 60 - 100 HP for cutting grass and clearing undergrowth up to 3 - 4cm in diameter.

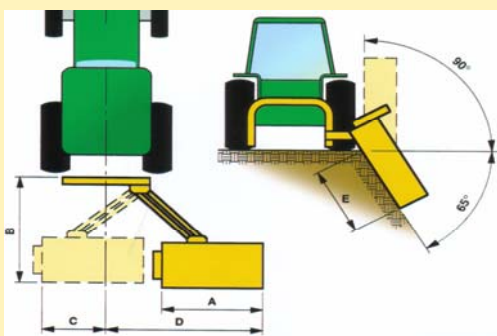

Specifications	Cutting Width m. (A)	Tractor HP	No. of Hammers	No of Belts	PTO Speed	B	C	D	E	Weight kg.
TA 140	140	60 - 100	12	4	540	170	60	215	130	615
TA 160	160	60 - 100	14	4	540	170	60	230	145	630
TA 180	180	60 - 100	16	4	540	170	60	250	165	645
TA 200	200	60 - 100	18	4	540	170	60	270	185	690
TA 220	220	70 - 100	20	4	540	170	60	290	205	750
TA 250	250	80 - 100	22	4	540	170	60	320	235	770

The Company's policy is one of continuous improvement and development, therefore specifications are subject to change without notice.

Manufactured in Italy by Berti