

Teagle

Mini-Garden Flail Mower



Good Mulching and Good Finish provided by high rotor speed.

Rear Mounting for compact tractors 12-22 HP fitted with Cat. 1 linkage.


Electronically Balanced high speed rotor fitted with "Y" Flails.

All bearings are internal and greaseable for long life..

Easy Maintenance at low cost.

Height Adjustable self-cleaning rear roller reduces the risk of scalping.

Suitable for parks, gardens and general amenity areas

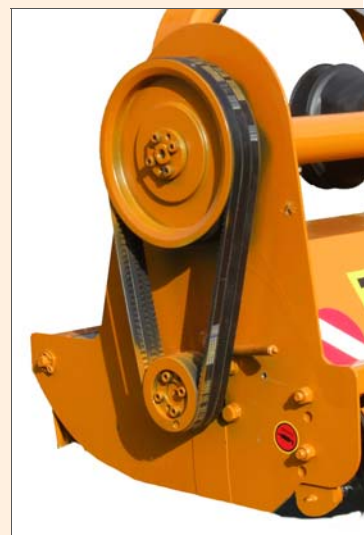

Specifications	115	125	145
Width Across Side Plates (m)	1.15	1.25	1.45
Overall Width (m)	1.24	1.34	1.54
Height (cm)	40	40	40
Length (cm)	70	70	70
No. of Blades	64	68	80
Weight (kg)	130	145	155
Number of Drive Belts	3	3	3
PTO Speed	540 RPM		
Power Req. (HP)	12-16	15-18	18-22

The Company's policy is one of continuous improvement and development, therefore specifications are subject to change without no-

Made in Italy by Berti

Teagle Machinery Ltd.,
Blackwater, Truro
Cornwall TR4 8HQ

Tel: 01872 560592
e-mail: sales@teagle.co.uk
website: www.teagle.co.uk